


Himalaya M6 Series

455-475W

144-cell Bifacial HJT Half Cell
Solar Module

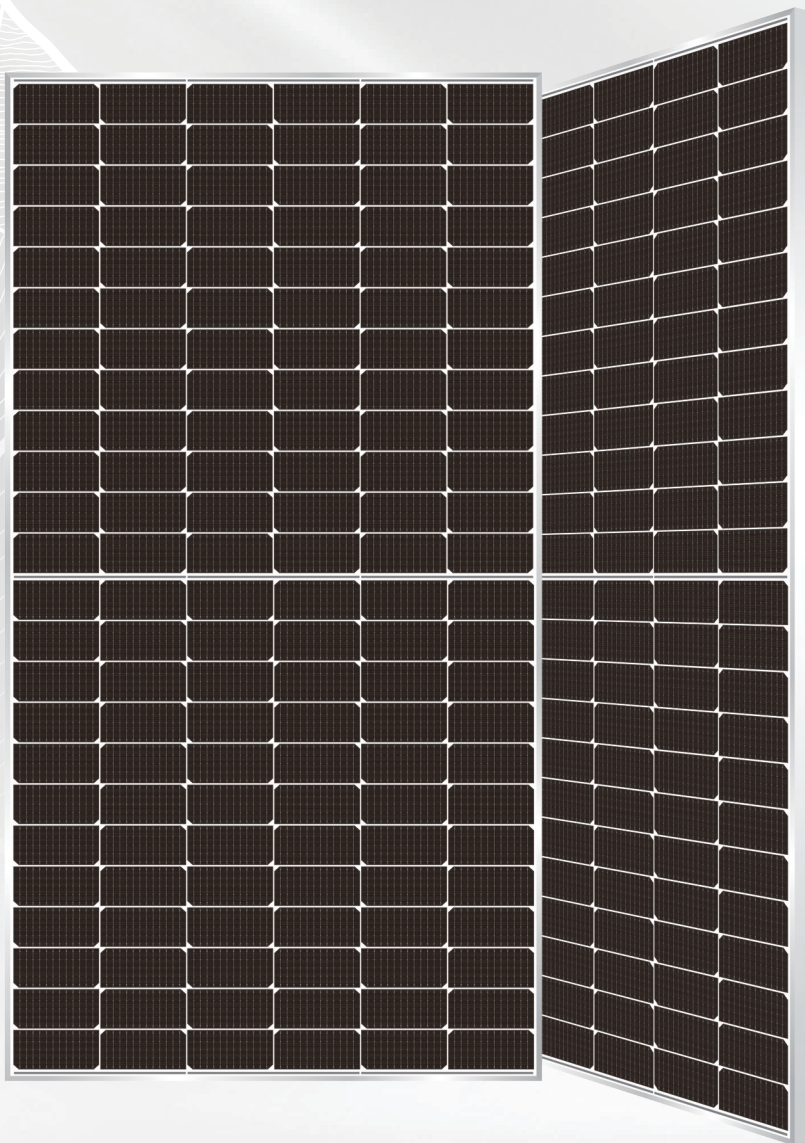

HJT

Heterojunction
Technology

M6

166mm Cell

M
SMBB

SMBB Half-Cut
Cell Technology



Up to 85% Bifaciality



Reliable · Durable
· Sustainable

WARRANTY

Product
Warranty **15**
years

Linear
Power
Warranty **30**
years



The Specification and key features described in this datasheet may deviate slightly and are not guaranteed, Anhui Huasun reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the latest version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.


Himalaya M6 Series 455-475W

144-cell Bifacial HJT Half Cell Solar Module



Engineering Drawings

Unit: mm

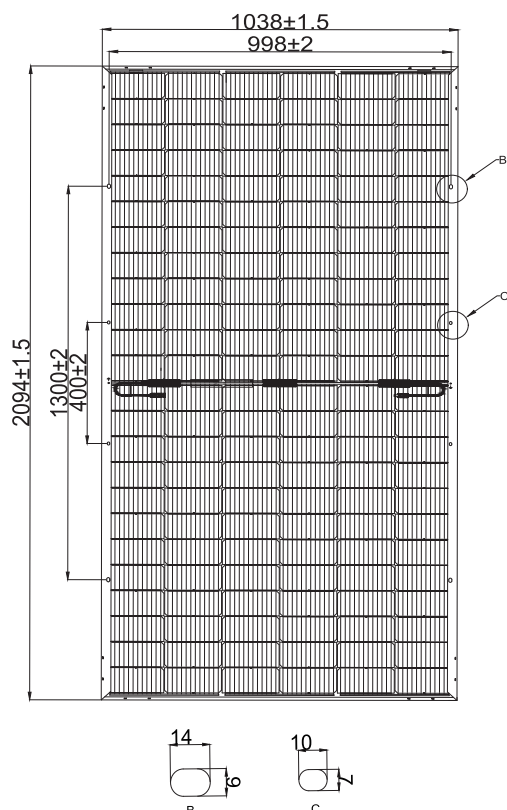

Electrical Characteristics (STC*)

Model	HS-B144	HS-B144	HS-B144	HS-B144	HS-B144
	DS455	DS460	DS465	DS470	DS475
Maximum Power (Pmax)	455W	460W	465W	470W	475W
Module Efficiency (%)	20.9%	21.16%	21.39%	21.62%	21.85%
Optimum Operating Voltage (Vmp)	45.04V	45.24V	45.44V	45.66V	45.86V
Optimum Operating Current (Imp)	10.12A	10.18A	10.24A	10.30A	10.36A
Open Circuit Voltage (Voc)	53.09V	53.22V	53.35V	53.48V	53.61V
Short Circuit Current (Isc)	10.52A	10.58A	10.64A	10.70A	10.76A
Operating Module Temperature	-40 to +85 °C				
Maximum System Voltage	DC1500V (IEC)				
Maximum Series Fuse	20A				
Power Tolerance	0~+5W				
Bifaciality	80% ± 5%				

*STC: Irradiance 1000 W/m², cell temperature 25 °C, AM=1.5, Tolerance of Pmax is within +/- 3%.

BSTC**

Maximum Power (Pmax)	505W	510W	520W	520W	525W
Optimum Operating Voltage (Vmp)	45.97V	46.20V	46.60V	46.60V	46.80V
Optimum Operating Current (Imp)	11.10A	11.14A	11.24A	11.24A	11.29A
Open Circuit Voltage (Voc)	54.13V	54.33V	55.33V	55.33V	55.93V
Short Circuit Current (Isc)	11.50A	11.53A	11.61A	11.61A	11.65A

**BSTC: Front side irradiation 1000W/m², back side reflection irradiation 135W/m², AM=1.5, ambient temperature 25 °C.


Temperature Characteristics

Nominal Operating Cell Temp. (NOCT)	44 °C ± 2 °C
Temperature coefficient of Pmax	-0.26%/°C
Temperature coefficient of Voc	-0.24%/°C
Temperature coefficient of Isc	0.04%/°C

Safety & Warranty

Safety Class	Class II
Product Warranty	15 yrs Workmanship
Performance Warranty	30 yrs Linear Warranty*

* 1st year 99%, after 2nd year 0.375% annual degradation to year 30.

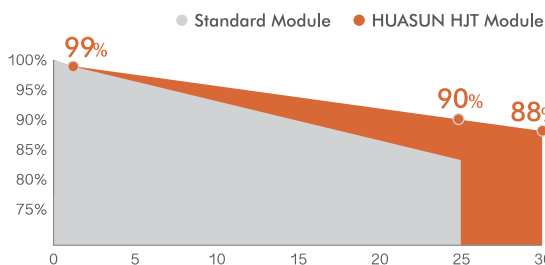

* Refer to HUASUN standard warranty for details

Mechanical Characteristics

Cell Type	HJT Mono 166 × 83mm
Cell Connection	144 (72 × 2)
Module Dimension	2094 × 1038 × 30 mm
Weight	27.5 kg
Junction Box	IP67 / IP68
Output Cable	4mm ² , 1200mm in length, length can be customized / UV Resistant
Connectors Type	MC4 Compatible
Frame	Anodised Aluminum Alloy
Encapsulant	POE
Front Load	5400 Pa
Rear Load	2400 Pa
Glass Thickness	(F) 2.0mm Anti-reflective surface Solar glass (B) 2.0mm Solar glass

Shipping Configurations

	HC	GP
Container Length	40'	20'
Pallets Per Container	22	5
Modules Per Pallet (pcs)	36	36
Modules Per Container (pcs)	792	180



Kontakt Österreich: R&S Direkt Sourcing GmbH, office@direktsourcing.com